


# GRL-P-L-SUS

# SINGLE-FLANGED PLASTIC GUIDE ROLLERS

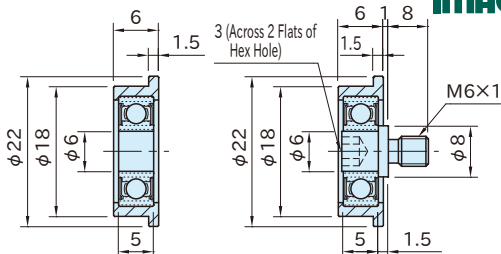

**GRL2206P-L-SUS**

**GRL22M6P-L-SUS**

**GRL2206P-L-SUS**

**GRL22M6P-L-SUS**

Part Number	Bearing Type	Allowable Load (N)	Weight (g)
<b>GRL2206P-L-SUS</b>	696HZZ	98	4.7
<b>GRL22M6P-L-SUS</b>			7.4

Part Number	Body	Bearing	Stud
<b>GRL2206P-L-SUS</b>	Polyacetal plastic	SUS440C	—
<b>GRL22M6P-L-SUS</b>	White	stainless steel	SUS303 stainless steel

## Notes

- Roller pin for **GRL2206P-L-SUS** should be prepared by the customer.
- Do not use in applications where impact load or axial load is applied.
- "Allowable Load" mentioned above means allowable radial load based on the test of rotating the roller a million times at the speed of 300min<sup>-1</sup>. Consider the above load values as reference since load capacity varies with use conditions or environments.

## Feature

The plastic body provides silent running.

## Technical Information

Heatresistant Temperature 105°C