



QCPSC

SHAFT COLLARS



Body
A5052 aluminum alloy
Anodized
Natural

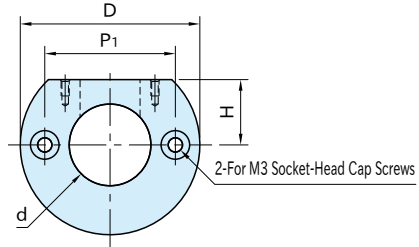

Part Number	d (+0.2 +0.1)	H	D	L	P	M	d ₁	P ₁	L ₁	Shaft Dia. (*)
QCPSC0828-20	20	16	44	20	22	M2×0.4 Depth 4	14.7	32	16	φ 20
QCPSC0828-25	25	18.5	48					36		φ 25
QCPSC1036-20	20	16	50	24	28	M3×0.5 Depth 6	17.7	36	20	φ 20
QCPSC1036-25	25	18.5	52					38		φ 25

*) Recommended shaft tolerance is JIS f8, g6, h5-h9.

Part Number	Weight (g)	Proper One Touch Push Lock Clamp	
QCPSC0828-20	55	QCPS-OG-F	0828-6
QCPSC0828-25	62	QCPS-BK-F	
		QCPS-S-F	
QCPSC1036-20	86	QCPS-OG-D	1036-6
QCPSC1036-25	88	QCPS-BK-D	
		QCPS-S-D	

Supplied With

- **QCPSC0828-20** **QCPSC0828-25**:
2 of socket-head cap screw (stainless steel),
M3×0.5-20L
- **QCPSC1036-20** **QCPSC1036-25**:
2 of socket-head cap screw (stainless steel),
M3×0.5-25L

